



## Инструкция по настройке Wi-Fi (модем Thomson TWG870 с блоком Wi-Fi)

1. Открываем любой браузер (Internet Explorer, Mozilla FireFox, Google Chrome, и т.д).  
В адресной строке вводим **192.168.0.1**:

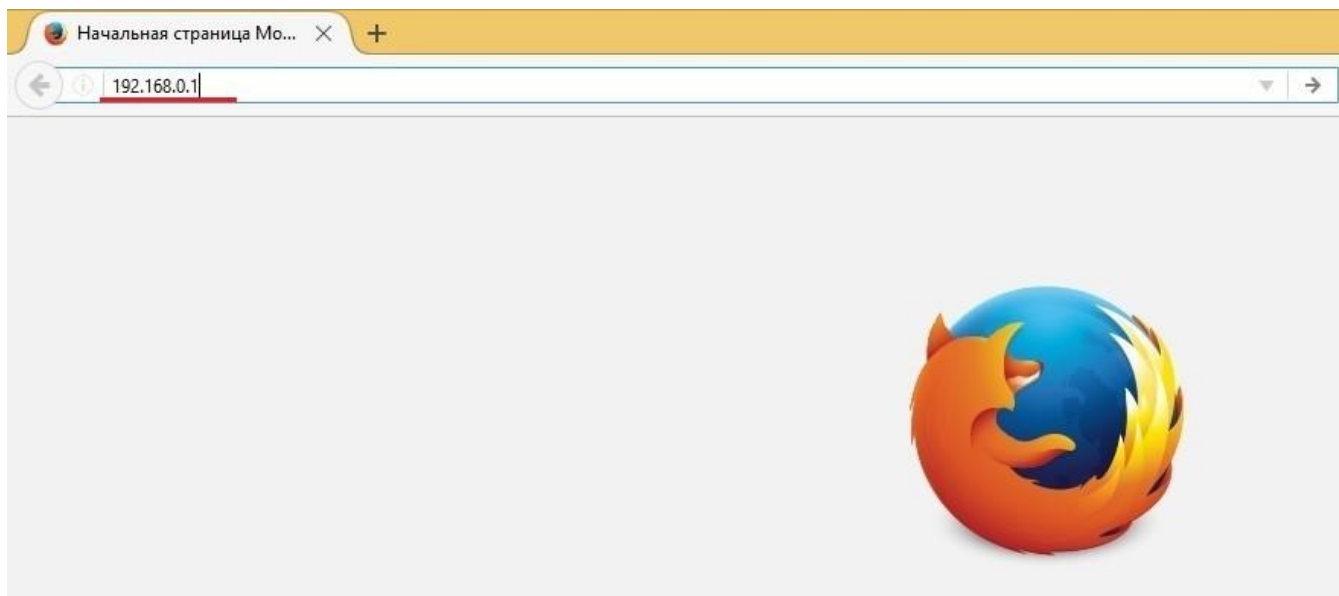

2. В окне авторизации поле «**Имя пользователя**» оставляем пустым.  
В поле «**Пароль**» вводим **admin**.  
Далее нажимаем «**ОК**».

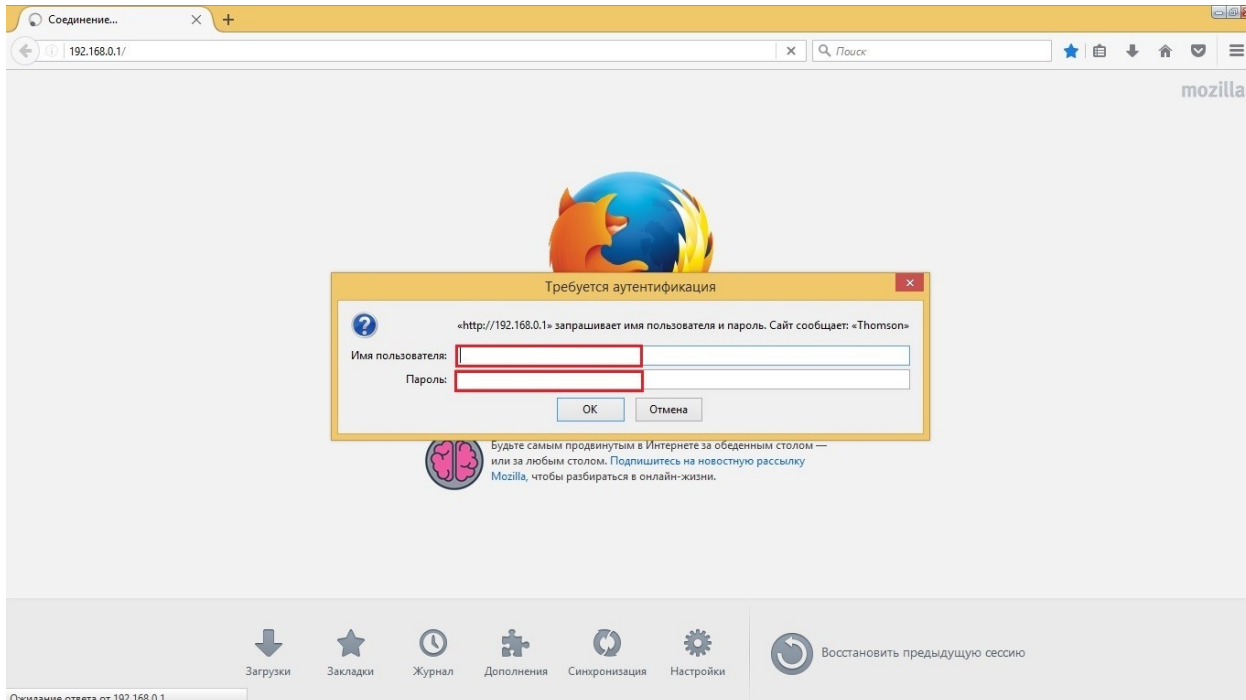

3. На Web-интерфейсе модема переходим во вкладку «**Wireless**» -> «**PrimaryNetwork**».  
В поле «**NetworkName (SSID)**» вводим желаемое имя беспроводной сети. Имя должно состоять из букв и/или цифр.

В поле «WPA Pre-SharedKey» вводим желаемый пароль. Пароль должен состоять из букв и/или цифр (не менее 8 символов).

Для сохранения настроек нажимаем «Apply».

The screenshot shows the Thomson Residential Gateway Administration interface. The browser address bar displays '192.168.0.1/wlanPrimaryNetwork.asp'. The page title is 'Administration' and the breadcrumb trail includes 'Wireless'. The left sidebar has 'Primary Network' selected. The main content area is titled 'Wireless' and contains the following configuration options:

- Primary Network Cosmos TV (80:c6:ab:2a:0c:7a)
- Primary Network: Enabled
- Automatic Security Configuration: Disabled
- Network Name (SSID): Cosmos TV
- Closed Network: Open
- AP Isolate: Disabled
- WPA: Disabled
- WPA-PSK: Disabled
- WPA2: Disabled
- WPA2-PSK: Enabled
- WPA/WPA2 Encryption: AES
- WPA Pre-Shared Key: 12345678
- Show Key:
- RADIUS Server: 0.0.0.0
- RADIUS Port: 1812
- RADIUS Key: [Empty field]

4. Настройка завершена.